

RLG Level Switches with Float

RLG is a compact floating level switch with external weight. The switch can be installed by tie-wrapping it to a support structure or by adding an external weight to the cable.

The unit is ultrasonically welded and potted for a complete seal. 10A SPDT contacts are included so the unit can be used to empty or fill a tank .

Features

- 10(8)A 250V SPDT Contact Rating
- External Weight Supplied as Standard
- Long 5m Cable Length




Model Type	Model	Description
	RLG-05	Level Switch with Float for Clear Water, 5m Cable

Technical Data		
	Float Material	ABS Plastic
	Switching Contacts	10(8)A 250Vac SPDT
	Operation Angle	25° above, 10° below horizontal
	Cable	5m PVC-jacketed
	External Weight	Supplied as standard
	Dimensions	W118 x H67 mm

INSTALLATION DETAILS	
	RLG level switch is supplied with cable with three wires, black, blue and brown with maximum rating of 10(8)A 250Vac.
	Black - Common
	Blue - Closed when tank full
	Brown - Closed when tank empty

TYPICAL INSTALLATION

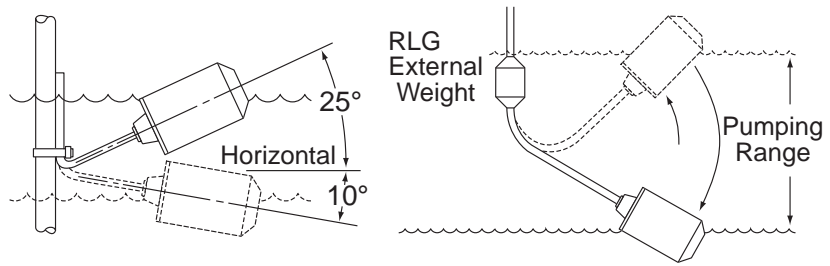

WIRING: Black & Blue - Closed when Tank Full
 Black & Brown - Closed when Tank Empty